

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
31 March 2005 (31.03.2005)

PCT

(10) International Publication Number  
**WO 2005/029031 A2**

- (51) International Patent Classification<sup>7</sup>: **G01N**
- (21) International Application Number:  
PCT/US2004/024788
- (22) International Filing Date: 2 August 2004 (02.08.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/492,061 1 August 2003 (01.08.2003) US
- (71) Applicant (for all designated States except US): **HTS BIOSYSTEMS, INC.** [US/US]; 111 Roberts Street, East Hartford, CT 01608 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **TRACY, David, H.** [US/US]; 581 Belden Hill Road, Norwalk, CT 06850 (US).
- (74) Agents: **YANKWICH, Leon, R.** et al.; Yankwich & Associates, 201 Broadway, Cambridge, MA 02139 (US).


- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations
- of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR QUANTITATING SURFACE-BINDING OPTICAL RESONANCE PROFILES

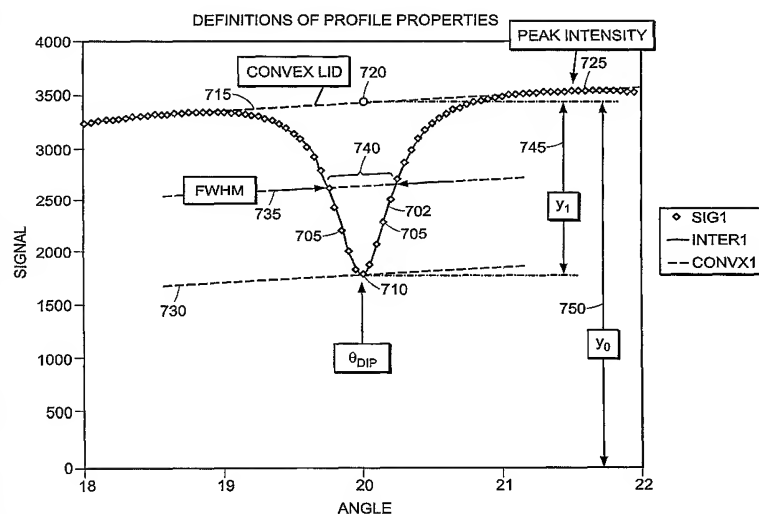

(57) Abstract: Empirical Profile Fits are used to quantitate Surface-binding Optical Resonance profiles. The EPF process has two stages, Calibration and Fit. In the Calibration stage, a calibration surface-binding optical resonance scan is obtained with relatively fine angle or wavelength spacing over a range sufficient to include full resonance profiles for all regions. Smoothed, subsampled empirical profiles for each Region of Interest are generated by the main calibration module, together with first derivative curves and diagnostic information. Properties returned may include approximate resonance position, depth, and width. In the Fit stage, individual ROI scans are used for measurement of resonance shifts relative to the empirical profile. The fitting module identifies the region of the experimental scan encompassing the resonance and fits that region using the previously stored

empirical profiles, quantifying and returning the desired values, including the shift in the resonance as compared to its location at calibration, estimated absolute angles or wavelengths, time of resonance minimum, and additional diagnostic and quality information. Optionally, data obtained from either Calibration or Fit stages may be exported for analysis on other systems. In a preferred embodiment, Instrument Control and Data Acquisition Software sets internal parameters in the EPF Calibration module and sends raw data from a calibration scan to the EPF Calibration module, which funnels the data through a Sub-sampler and a Savitsky-Golay smoothing routine before taking derivatives and characterizing the data to create an empirical profile for the chip. The empirical profiles are then optionally stored. Next, Instrument Control and Data Acquisition Software sets internal parameters in the EPF Fitting module and sends raw data from a run-time scan performed utilizing the chip to the EPF Fitting module, which qualifies it, queries the EPF Calibration module for the empirical profile for the chip, and fits the curve, iterating when necessary. Results from the fitting process are then returned and thereby provided to the user.



**Published:**

— without international search report and to be republished  
upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*